

PLANT SCHEDULE						
KEY	QTY	BOTANICAL NAME	COMMON NAME	SIZE	ROOT	REMARKS
AR2	3	<i>Acer rubrum</i>	Red Maple	2" Cal.	B&B	AS SHOWN
POC	4	<i>Platanus occidentalis</i>	American Sycamore	2" Cal.	B&B	AS SHOWN
LS2	3	<i>Liquidambar straciflua</i>	Sweetgum	2" Cal.	B&B	AS SHOWN

DNR QUALIFIED FORESTRY PROFESSIONAL

THIS PLAN COMPLIES WITH THE CURRENT REQUIREMENTS OF SUBTITLE 25  
AND THE WOODLAND AND WILDLIFE CONSERVATION TECHNICAL MANUAL.


SIGNED: Marla Duley Date: 12-08-2023

MARLA DULEY  
LEAD ENVIRONMENTAL SCIENTIST, QP  
3501 N EAST PRATT STREET, SUITE 300, BALTIMORE, MARYLAND 21202  
410-246-0332  
MARLA.DULEY@WSP.COM



**MISS UTILITY**  
48 HOURS BEFORE YOU DIG  
CALL "MISS UTILITY" AT 811  
OR LOG ON TO [www.missutility.net](http://www.missutility.net)

CALL "MISS UTILITY" AT 1-800-257-7777, 48 HOURS PRIOR TO THE START OF WORK. THE EXCAVATOR MUST NOTIFY ALL PUBLIC UTILITY COMPANIES WITH UNDERGROUND FACILITIES IN THE AREA OF PROPOSED EXCAVATION AND HAVE THOSE FACILITIES LOCATED BY THE UTILITY COMPANIES PRIOR TO COMMENCING EXCAVATION. THE EXCAVATOR IS RESPONSIBLE FOR COMPLIANCE WITH REQUIREMENTS OF THE PRINCE GEORGE'S COUNTY CODE.

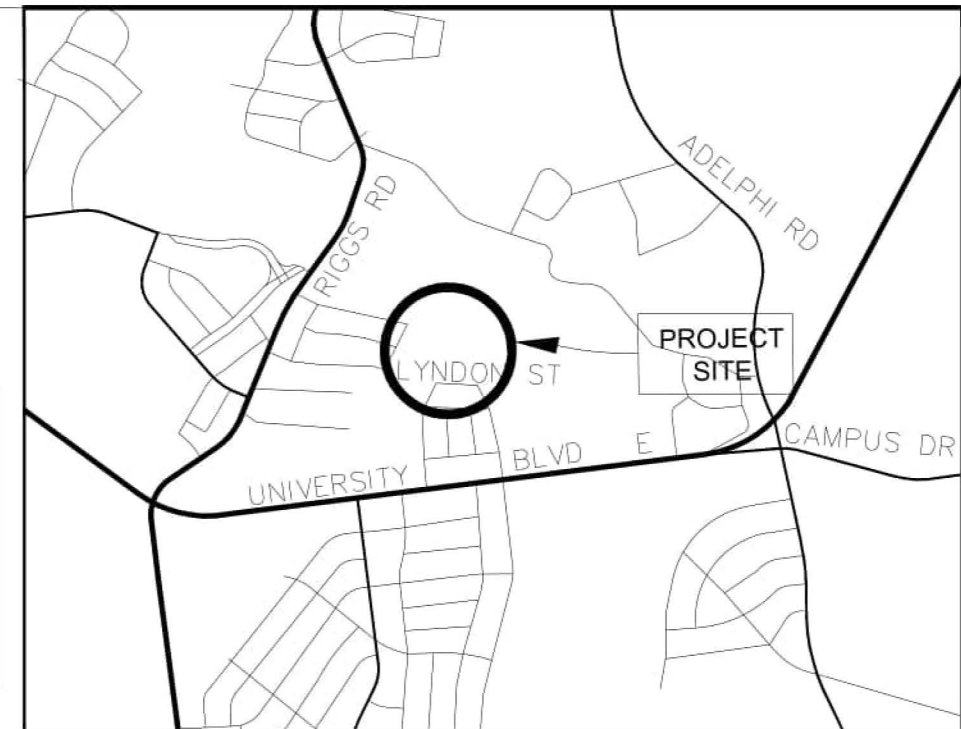

VICINITY A



NOTE:  
GENERALLY, ROOT PRUNING AND TREE PROTECTION FENCE ARE  
LOCATED AT THE LIMIT OF DISTURBANCE. THEREFORE, THE  
LAYOUT OF LINES DEPICTING TREE PROTECTION FENCE AND  
ROOT PRUNING IS DIAGRAMMATIC, AND FOR REFERENCE  
ONLY. PLEASE REFER TO THE STRESS REDUCTION DETAIL FOR  
MORE INFORMATION.

### GENERAL NOTES

1. This plan is submitted to fulfill the woodland conservation requirements for TCP2-0222-92.
2. Cutting or clearing of woodland not in conformance with this plan or without the expressed written consent of the Planning Director or designee shall be subject to a \$9.00 per square foot mitigation fee.
3. A pre-construction meeting is required prior to the issuance of grading permits. The Department of Environment (DoE) and the Prince George's County Department of Parks and Recreation, as appropriate, shall be contacted prior to the start of any work on the site to conduct a pre-construction meeting where implementation of woodland conservation measures shown on this plan will be discussed in detail.
4. The developer or builder of the lots or parcels shown on this plan shall notify future buyers of any woodland conservation areas through the provision of a copy of this plan at time of contract signing. Future property owners are also subject to this requirement.
5. The owners of the property subject to this tree conservation plan are solely responsible for conformance to the requirements contained herein.
6. The property is within the Developed Tier and is zoned ROS.
7. The site is not adjacent to a roadway designated as scenic, historic, a parkway or a scenic byway.
8. The site is not adjacent to a roadway classified as arterial or greater.
9. This plan is grandfathered under CB-27-2010, Section 25-117 (g)

ANACOSTIA WATERSHED  
RESTORATION SITE 13 PEDESTRIAN  
BRIDGE RELOCATION

## SOIL TYPES

MAP UNIT SYMBOL	MAP UNIT NAME	K FACTOR	HYDRIC RATING	HYDROLOGIC SOIL GROUP	DRAINAGE CLASS
CF	Codorus and Hatboro soils, frequently flooded	N/A	No	C	Moderately well drained
Ch	Codorus-Hatboro-Urban land complex, frequently flooded	N/A	No	D	Moderately well drained
UrwB	Urban land-Woodstown complex, 0 to 5 percent slopes	N/A	No	D	Moderately well drained
WuB	Woodstown-Urban land complex, 0 to 5 percent slopes	0.28	No	C, D	Moderately well drained

**PROPERTY INFORMATION:** (2 parcels)

Plat: Block: Lot: Parcel: 142 Description: Subdivision: Agerage: 20.73 Liber: 01418 Folio: 003 Tax Map Grid: 32-E2 WSSCGrid: 210NE02 Assessment District: Planning Area: 65 Planning Analysis Zone:	Plat: Block: Lot: Parcel: 149 Description: Subdivision: Agerage: 0.83 Liber: Folio: Tax Map Grid: 00-E2 WSSCGrid: 210NE02 Assessment District: Planning Area: 65 Planning Analysis Zone:
---	--

## SPECIMEN TREE TABLE

TREE ID	SIZE (DBH) INCHES	COMMON NAME	SCIENTIFIC NAME	CONDITION	COMMENTS
1	30	Tulip poplar	<i>Liriodendron tulipifera</i>	Poor	Dead limbs and covered in vines, including poison ivy and fortune's spidle.
2	30	Tulip poplar	<i>Liriodendron tulipifera</i>	Poor	Dead limbs and dense poison ivy vines.
3	42	Red oak	<i>Quercus rubra</i>	Good	Minor lean
4	54	Red oak	<i>Quercus rubra</i>	Good	-
5	36	Mockernut hickory	<i>Carya tomentosa</i>	Fair	Double trunk and a couple small dead limbs.
6	48	Mockernut hickory	<i>Carya tomentosa</i>	Poor	Leaning, deformed limbs, and dense poison ivy vines present.
7	30	Mockernut hickory	<i>Carya tomentosa</i>	Good	-
8	36	Mockernut hickory	<i>Carya tomentosa</i>	Fair	Poison ivy vines present.
9	30	Eastern cottonwood	<i>Populus deltoides</i>	Good	-
10	30	Mockernut hickory	<i>Carya tomentosa</i>	Good	-
11	44	Silver maple	<i>Acer saccharinum</i>	Fair	Compound base and some deformed limbs
12	30.5	Tulip poplar	<i>Liriodendron tulipifera</i>	Fair	Poison ivy vines present and a dead limb.
13	30	Mockernut hickory	<i>Carya tomentosa</i>	Good	-
14	30	Silver maple	<i>Acer saccharinum</i>	Fair	Poison ivy vines present.

### PROPERTY OWNERS AWARENESS CERTIFICATE

I/WE, MARYLAND NATIONAL CAPITAL PARKS AND PLANNING COMMISSION OF PRINCE GEORGE'S COUNTY, HEREBY ACKNOWLEDGE THAT WE ARE AWARE OF THIS TYPE 2 TREE CONSERVATION PLAN (TCP2) AND THAT WE UNDERSTAND THE REQUIREMENTS AS SET FORTH IN THIS TCP2.

<u>Jennifer Bruneau</u>	3/7/2024
OWNER OR OWNERS REPRESENTATIVE	DATE

**Woodland Conservation Worksheet**  
for Governmental and Linear Projects in Prince George's County

SECTION 1-Establishing Site Information			
1	Property Description or Name:	Anacostia Watershed Restoration Pedestrian Bridge Replacement	
	Project Location:	(Site 13) Northwest Branch: SVP Park	
	TCP2 Number:	TCP2-022-92	Rev. No: -01
	NRI Number:	NRI-151-13	Rev. No: -03
5	Zone:	ROS	
6	Gross Tract Area	21.56	acres
7	Project Area/Limits of Disturbance	0.25	acres

## SECTION 2-Determining Requirements

8	Existing Woodland in Project Limits = WCT	0.125	or	50.00%
9	Woodland Cleared in Project Limits	0.10		
10	Total area of woodland cleared (subject to 1:1 replacement)	0.10		
11	Off-Site Woodland Conservation Provided (afforestation)	0.00		
12	Off-Site Woodland Conservation Provided (preservation)	0.00		
13	Woodland Conservation Requirement:	0.125	acres	

### SECTION 3- Meeting the Requirements

14	Woodland Preserved	0.025		
15	Afforestation /Reforestation	0.10	Bond amount:	\$ 1,306.80
16	Natural Regeneration	0.00		
17	Landscape Credit	0.00		
18	Speciment/historic Tree Credit (CRZ area "2.0)	0.00		
19	Forest Enhancement Credit (Area "25)	0.00		
20	Street Tree Credit (Existing or 10-year canopy coverage)	0.00		
21	Prior Credit for Off-site Woodland Conservation	0.00		
22	Current Credit for Off-site Woodland Conservation	0.00		
23	Off-site Woodland Conservation provided (afforestation)	0.00		
24	Off-site Woodland Conservation provided (preservation)	0.00		
25	Area Approved for Fee-in-lieu/PFA	0.00	Fee amount:	\$0.00
26	Area Approved for Fee-in-lieu/non-PFA	0.00	Fee amount:	\$0.00
27	Woodland Conservation Provided	0.125	acres	

28 Prepared by: Mada Duly 12/08/2023

Signed \_\_\_\_\_ Date \_\_\_\_\_

### QUALIFICATION PROFESSIONAL CERTIFICATION

THIS PLAN COMPLIES WITH THE CURRENT REQUIREMENTS OF PRINCE  
GEORGE'S COUNTY CODE AND THE ENVIRONMENTAL TECHNICAL MANUAL.

SIGNED: \_\_\_\_\_ Date: 12-08-2023

MARLA DULEY  
LEAD ENVIRONMENTAL SCIENTIST, QP  
WSP, 1 EAST PRATT STREET, SUITE 300, BALTIMORE, MARYLAND 21202  
410-246-0532  
MARLA.DULEY@WSP.COM

Prince George's County Planning Department, M-NCPPC  
Environmental Planning Section  
TYPE 2 TREE CONSERVATION PLAN APPROVAL  
TCP2-022-92-00

	Approved by	Date	DRD#	Reason for Revision
00	D. Wood	2/19/1992	NA	Lyndon Street Water Quality Retrofit
01	<i>Kim Finch</i>	<i>3/25/2024</i>		Bridge relocation
02				
03				
04				
05				

נש"א

WSP USA Inc.  
1 EAST PRATT STREET  
SUITE 300  
BALTIMORE, MD 21202  
TEL: +1.410.727.5050  
FAX: +1.410.727.4608

## TYPE 2 TREE CONSERVATION PLAN

# TCP1.0



1. ALL WOODLANDS DESIGNATED ON THIS PLAN FOR PRESERVATION ARE THE RESPONSIBILITY OF THE PROPERTY OWNER. THE WOODLAND AREAS SHALL REMAIN IN A NATURAL STATE. THIS INCLUDES THE CANOPY TREES AND UNDERSTORY VEGETATION. A REVISED TREE CONSERVATION PLAN IS REQUIRED PRIOR TO CLEARING WOODLAND AREAS THAT ARE NOT SPECIFICALLY IDENTIFIED TO BE CLEARED ON THE APPROVED TCP2.
2. TREE AND WOODLAND CONSERVATION METHODS SUCH AS ROOT PRUNING SHALL BE CONDUCTED AS NOTED ON THIS PLAN.
3. THE LOCATION OF ALL TEMPORARY TREE PROTECTION FENCING (TPFs) SHOWN ON THIS PLAN SHALL BE FLAGGED OR STAKED IN THE FIELD PRIOR TO THE PRE-CONSTRUCTION MEETING. UPON APPROVAL OF THE LOCATIONS BY THE COUNTY INSPECTOR, INSTALLATION OF THE TPFs MAY BEGIN.
4. ALL TEMPORARY TREE PROTECTION FENCING REQUIRED BY THIS PLAN SHALL BE INSTALLED PRIOR TO COMMENCEMENT OF CLEARING AND GRADING OF THE SITE AND SHALL REMAIN IN PLACE UNTIL THE BOND IS RELEASED FOR THIS PROJECT. FAILURE TO INSTALL AND MAINTAIN TEMPORARY OR PERMANENT TREE PROTECTIVE DEVICES IS A VIOLATION OF THIS TCP2.
5. WOODLAND PRESERVATION AREAS SHALL BE POSTED WITH SIGNAGE AS SHOWN ON THE PLANS AT THE SAME TIME AS THE TEMPORARY TPF INSTALLATION. THESE SIGNS MUST REMAIN IN PERPETUITY.

- THE DEVELOPER AND/OR BUILDER IS RESPONSIBLE FOR THE COMPLETE PRESERVATION OF ALL FORESTED AREAS SHOWN ON THE APPROVED PLAN TO REMAIN UNDISTURBED. ONLY TREES OR PARTS THEREOF DESIGNATED BY THE COUNTY AS DEAD, DYING, OR HAZARDOUS MAY BE REMOVED.
7. A TREE IS CONSIDERED HAZARDOUS IF A CONDITION IS PRESENT WHICH LEADS A CERTIFIED ARBORIST OR LICENSED TREE EXPERT TO BELIEVE THAT THE TREE OR A PORTION OF THE TREE HAS A POTENTIAL TO FALL AND STRIKE A STRUCTURE, PARKING AREA, OR OTHER HIGH USE AREA AND RESULT IN PERSONAL INJURY OR PROPERTY DAMAGE.
8. DURING THE INITIAL STAGES OF CLEARING AND GRADING, IF HAZARDOUS TREES ARE PRESENT, OR TREES ARE PRESENT THAT ARE NOT HAZARDOUS BUT ARE LEANING INTO THE DISTURBED AREA, THE PERMITEE SHALL REMOVE SAID TREES USING A CHAINSAW. CORRECTIVE MEASURES REQUIRING THE REMOVAL OF THE HAZARDOUS TREE OR PORTIONS THEREOF SHALL REQUIRE AUTHORIZATION BY THE COUNTY INSPECTOR. ONLY AFTER APPROVAL BY THE INSPECTOR MAY THE TREE BE CUT BY CHAINSAW TO NEAR THE EXISTING GROUND LEVEL. THE STUMP SHALL NOT BE REMOVED OR COVERED WITH SOIL, MULCH OR OTHER MATERIALS THAT WOULD INHIBIT SPROUTING.
9. IF A TREE OR TREES BECOME HAZARDOUS PRIOR TO BOND RELEASE FOR THE PROJECT, DUE TO STORM EVENTS OR OTHER SITUATIONS NOT RESULTING FROM AN ACTION BY THE PERMITEE, PRIOR TO REMOVAL, A CERTIFIED ARBORIST OR A LICENSED TREE EXPERT MUST CERTIFY THAT THE TREE OR PORTION OF THE TREE IN QUESTION HAS A POTENTIAL TO FALL AND STRIKE A STRUCTURE, PARKING AREA, OR OTHER HIGH USE AREA AND MAY RESULT IN PERSONAL INJURY OR PROPERTY DAMAGE. IF A TREE OR PORTION THEREOF ARE IN IMMINENT DANGER OF STRIKING A STRUCTURE, PARKING AREA, OR OTHER HIGH USE AREA AND MAY RESULT IN PERSONAL INJURY OR PROPERTY DAMAGE THEN THE CERTIFICATION IS NOT REQUIRED AND THE PERMITEE SHALL TAKE CORRECTIVE ACTION IMMEDIATELY. THE CONDITION OF THE AREA SHALL BE FULLY DOCUMENTED THROUGH PHOTOGRAPHS PRIOR TO CORRECTIVE ACTION BEING TAKEN. THE PHOTOS SHALL BE SUBMITTED TO THE INSPECTOR FOR DOCUMENTATION OF THE DAMAGE.


IF CORRECTIVE PRUNING MAY ALLEVIATE A HAZARDOUS CONDITION, THE CERTIFIED ARBORIST OR LICENSED TREE EXPERT MAY PROCEED WITHOUT FURTHER AUTHORIZATION. THE PRUNING MUST BE DONE IN ACCORDANCE WITH THE LATEST EDITION OF THE APPROPRIATE ANSI A-300 PRUNING STANDARDS. THE CONDITION OF THE AREA SHALL BE FULLY DOCUMENTED THROUGH PHOTOGRAPHS PRIOR TO CORRECTIVE ACTION BEING TAKEN. THE PHOTOS SHALL BE SUBMITTED TO THE INSPECTOR FOR DOCUMENTATION OF THE DAMAGE.

DEBRIS FROM THE TREE REMOVAL, OR PRUNING THAT OCCURS WITHIN 35 FEET OF THE WOODLAND EDGE SHALL BE REMOVED AND PROPERLY DISPOSED OF BY RECYCLING, CHIPPING OR OTHER ACCEPTABLE METHODS. ALL DEBRIS THAT IS MORE THAN 35 FEET FROM THE WOODLAND EDGE SHALL BE CUT UP TO ALLOW CONTACT WITH THE GROUND, THIS ENCOURAGING DECOMPOSITION. THE SMALLER MATERIALS SHALL BE PLACED INTO BRUSH PILES THAT WILL SERVE AS WILDLIFE HABITAT.

TREE WORK TO BE COMPLETED WITHIN A ROAD RIGHT-OF-WAY REQUIRES A PERMIT FROM THE MARYLAND DEPARTMENT OF NATURAL RESOURCES UNLESS THE TREE REMOVAL IS SHOWN WITHIN APPROVED LIMITS OF DISTURBANCE ON A TCP2. THE WORK IS REQUIRED TO BE CONDUCTED BY A LICENSED TREE EXPERT.

3. ALL AFFORESTATION AND REFORESTATION BONDS, BASED ON SQUARE FOOTAGE, SHALL BE POSTED WITH THE COUNTY PRIOR TO THE ISSUANCE OF ANY PERMITS. THESE BONDS WILL BE RETAINED AS SURETY UNTIL ALL REQUIRED ACTIVITIES HAVE BEEN SATISFIED OR THE REQUIRED TIMEFRAME FOR MAINTENANCE HAS PASSED, WHICHEVER IS LONGER.
2. THE PLANTING OF AFFORESTATION OR REFORESTATION AREAS SHALL BE COMPLETED PRIOR TO ISSUANCE OF THE FIRST BUILDING PERMIT. SEEDLING PLANTING IS TO OCCUR FROM MARCH THROUGH NOVEMBER ONLY. NO PLANTING SHALL BE DONE WHILE GROUND IS FROZEN. PLANTING OF LARGER CALIPER STOCK OR CONTAINERIZED STOCK MAY BE DONE AT ANY TIME PROVIDED A DETAILED MAINTENANCE SCHEDULE IS PROVIDED.
3. IF PLANTING CANNOT OCCUR DUE TO PLANTING CONDITIONS, THE DEVELOPER OR PROPERTY OWNER SHALL INSTALL THE FENCING AND SIGNAGE IN ACCORDANCE WITH THE APPROVED TYPE 2 TREE CONSERVATION PLAN. PLANTING SHALL THEN BE ACCOMPLISHED DURING THE NEXT PLANTING SEASON. IF PLANTING IS DELAYED BEYOND THE TRANSFER OF THE PROPERTY TITLE TO THE HOMEOWNER, THE DEVELOPER OR BUILDER SHALL OBTAIN A SIGNED STATEMENT FROM THE PURCHASER INDICATING THAT THEY UNDERSTAND THAT THE REFORESTATION AREA IS LOCATED ON THEIR PROPERTY AND THAT REFORESTATION WILL OCCUR DURING THE NEXT PLANTING SEASON. A COPY OF THAT DOCUMENT SHALL BE PRESENTED TO THE GRADING INSPECTOR AND THE COUNTY.
4. REFORESTATION AREAS SHALL NOT BE MOWED; HOWEVER, THE MANAGEMENT OF COMPETING VEGETATION AROUND INDIVIDUAL TREES AND REMOVAL OF NOXIOUS, INVASIVE, AND NON-NATIVE VEGETATION WITHIN THE REFORESTATION AREAS IS ACCEPTABLE.
5. ALL REQUIRED TEMPORARY TREE PROTECTION FENCING SHALL BE INSTALLED PRIOR TO THE CLEARING AND GRADING OF THE SITE AND SHALL REMAIN IN PLACE UNTIL THE PERMANENT TREE PROTECTION FENCING IS INSTALLED WITH THE REQUIRED PLANTING. THE TEMPORARY FENCING IS NOT REQUIRED TO BE INSTALLED IF THE PERMANENT FENCING IS INSTALLED PRIOR TO CLEARING AND GRADING OF THE SITE. FAILURE TO INSTALL AND MAINTAIN TEMPORARY OR PERMANENT TREE PROTECTIVE FENCING IS A VIOLATION OF THIS TCP2.
6. AFFORESTATION / REFORESTATION AREAS SHALL BE POSTED WITH NOTIFICATION SIGNAGE, AS SHOWN ON THE PLANS, AT THE SAME TIME AS THE PERMANENT PROTECTION FENCING INSTALLATION. THESE SIGNS SHALL REMAIN IN PERPETUITY.
7. THE COUNTY INSPECTOR SHALL BE NOTIFIED PRIOR TO SOIL PREPARATION OR INITIATION OF ANY TREE PLANTING ON THIS SITE.
8. AT THE TIME OF ISSUANCE OF THE FIRST PERMIT, THE FOLLOWING INFORMATION SHALL BE SUBMITTED TO THE M-NCPPC PLANNING DEPARTMENT REGARDING THE CONTRACTOR RESPONSIBLE FOR IMPLEMENTATION OF THIS PLAN: CONTRACTOR NAME; BUSINESS NAME (IF DIFFERENT); ADDRESS; AND PHONE NUMBER.  
RESULTS OF ANNUAL SURVIVAL CHECKS FOR EACH OF THE REQUIRED FOUR YEARS AFTER TREE PLANTING SHALL BE REPORTED TO THE M-NCPPC PLANNING DEPARTMENT.
9. FAILURE TO ESTABLISH THE AFFORESTATION OR REFORESTATION WITHIN THE PRESCRIBED TIME FRAME WILL RESULT IN FORFEITURE OF THE REFORESTATION BOND AND/OR A VIOLATION OF THIS PLAN INCLUDING THE ASSOCIATED \$9.00 PER SQUARE FOOT PER PENALTY UNLESS THE COUNTY INSPECTOR APPROVES A WRITTEN EXTENSION.

1. QUANTITY: (SEE PLANT SCHEDULE)
2. TYPE: (SEE PLANT SCHEDULE)
3. PLANT QUALITY STANDARDS: THE PLANTS SELECTED SHALL BE HEALTHY AND STURDY REPRESENTATIVES OF THEIR SPECIES. SEEDLINGS SHALL HAVE A MINIMUM TOP GROWTH OF 18". THE DIAMETER OF THE ROOT COLLAR (THE PART OF THE ROOT JUST BELOW GROUND) SHALL BE AT LEAST 3/8". THE ROOTS SHALL BE WELL DEVELOPED AND AT LEAST 8" LONG. NO MORE THAN TWENTY-FIVE PERCENT (25%) OF THE ROOT SYSTEM (BOTH PRIMARY AND AUXILIARY / FIBROUS ROOTS) SHALL BE PRESENT. PLANTS THAT DO NOT HAVE AN ABUNDANCE OF WELL DEVELOPED TERMINAL BUDS ON THE LEADERS AND BRANCHES SHALL BE REJECTED.
4. PLANTS SHALL BE SHIPPED BY THE NURSERY IMMEDIATELY AFTER LIFTING FROM THE FIELD OR REMOVAL FROM THE GREENHOUSE, AND PLANTED IMMEDIATELY UPON RECEIPT BY THE LANDSCAPE CONTRACTOR.
5. IF THE PLANTS CANNOT BE PLANTED IMMEDIATELY AFTER DELIVERY TO THE REFORESTATION SITE, THEY SHALL BE STORED IN THE SHADE WITH THEIR ROOT MASSES PROTECTED FROM DIRECT EXPOSURE TO SUN AND WIND BY THE USE OF STRAW, PEAT MOSS, COMPOST, OR OTHER SUITABLE MATERIAL AND SHALL BE MAINTAINED THROUGH PERIODIC WATERING, UNTIL THE TIME OF PLANTING.
6. PLANT HANDLING: THE QUANTITY OF THE SEEDLINGS TAKEN TO THE FIELD SHALL NOT EXCEED THE QUANTITY THAT CAN BE PLANTED IN A DAY. SEEDLINGS, ONCE REMOVED FROM THE NURSERY OR TEMPORARY STORAGE AREA SHALL BE PLANTED IMMEDIATELY.
7. TIMING OF PLANTING: THE BEST TIME TO PLANT SEEDLINGS IS WHILE THEY ARE DORMANT, PRIOR TO SPRING BUDDING. THE MOST SUITABLE MONTHS FOR PLANTING ARE MARCH AND APRIL, WHEN SOIL IS MOIST, BUT MAY BE PLANTED FROM MARCH THROUGH NOVEMBER. NO PLANTING SHALL BE DONE WHILE THE GROUND IS FROZEN. PLANTING SHALL OCCUR WITHIN ONE GROWING SEASON OF THE ISSUANCE OF GRADING / BUILDING PERMITS AND/OR REACHING THE FINAL GRADES AND STABILIZATION OF PLANTING AREAS.
8. SEEDLING AREAS: TREE SEEDLINGS SHALL BE HAND PLANTED USING A DOUBLE BAR OR SHARP-SHOOTER SHOVEL. IT IS IMPORTANT THAT THE SEEDLINGS BE PLACED IN THE HOLE SO THAT THE ROOTS CAN SPREAD OUT NATURALLY; THEY SHOULD NOT BE TWISTED, BALLED UP OR BENT. MOIST SOIL SHOULD THEN BE PACKED FIRMLY AROUND THE ROOTS. SEEDLINGS SHOULD BE PLANTED AT A DEPTH WHERE THEIR ROOTS LIE JUST BELOW THE GROUND SURFACE. AIR POCKETS SHOULD NOT BE LEFT AFTER CLOSING THE HOLE WHICH WOULD ALLOW THE ROOTS TO DRY OUT. SEE PLANTING DETAILS FOR FURTHER EXPLANATION. IF THE CONTRACTOR WISHES TO PLANT BY ANOTHER METHOD, THE PREPARER OF THIS TREE CONSERVATION PLAN MUST BE CONTACTED AND GIVE HIS APPROVAL BEFORE PLANTING MAY BEGIN.
9. SPACING: SEE PLANT SCHEDULE AND/OR PLANTING PLAN FOR SPACING REQUIREMENTS. ALSO REFER TO THE PLANTING LAYOUT DETAIL FOR A DESCRIPTION OF THE GENERAL PLANTING THEORY.
10. SOIL: UPON THE COMPLETION OF ALL GRADING OPERATIONS, A SOIL TEST SHALL BE CONDUCTED TO DETERMINE WHAT SOIL PREPARATION AND SOIL AMENDMENTS, IF ANY, ARE NECESSARY TO CREATE GOOD TREE GROWING CONDITIONS. SOIL SAMPLES SHALL BE TAKEN AT A RATE THAT PROVIDES ONE SOIL SAMPLE FOR EACH AREA THAT APPEARS TO HAVE A DIFFERENT SOIL TYPE (IF THE ENTIRE AREA APPEARS UNIFORM, THEN ONLY ONE SAMPLE IS NECESSARY), AND SUBMITTED FOR TESTING TO A PRIVATE COMPANY. THE COMPANY OF CHOICE SHALL MAKE RECOMMENDATIONS FOR IMPROVING THE EXISTING SOIL. THE SOIL WILL BE TESTED AND RECOMMENDED FOR CORRECTIONS OF SOIL TEXTURE, pH, MAGNESIUM, PHOSPHORUS, POTASSIUM, CALCIUM AND ORGANIC MATTER.
11. SOIL IMPROVEMENT MEASURES: THE SOIL SHALL THEN BE IMPROVED ACCORDING TO THE RECOMMENDATIONS MADE BY THE TESTING COMPANY.
12. FENCING AND SIGNAGE: FINAL PROTECTIVE FENCING SHALL BE PLACED ON THE VISIBLE AND/OR DEVELOPMENT SIDE OF PLANTING AREAS. THE FINAL PROTECTIVE FENCE SHALL BE INSTALLED UPON COMPLETION OF PLANTING OPERATIONS UNLESS IT WAS INSTALLED DURING THE INITIAL STAGES OF DEVELOPMENT. SIGNS SHALL BE POSTED PER THE SIGNAGE DETAIL ON THIS SHEET.
13. PLANTING METHOD: CONSULT THE PLANTING DETAIL(S) SHOWN ON THIS PLAN
14. MULCHING: APPLY TWO-INCH THICK LAYER OF WOODCHIP OR SHREDDED HARDWOOD MULCH (AS NOTED) TO EACH PLANTING SITE (SEE DETAIL SHOWN ON THIS PLAN).
15. GROUND COVER ESTABLISHMENT: THE REMAINING DISTURBED AREA BETWEEN SEEDLINGS PLANTING SITES SHALL BE SEEDDED AND STABILIZED WITH WHITE CLOVER SEED AT THE RATE OF 5 LBS/ACRE.
16. MOWING AND MOWING SHALL BE ALLOWED IN ANY PLANTING AREA.
17. SURVIVAL CHECK FOR BOND RELEASE: THE SEEDLING PLANTING IS TO BE CHECKED AT THE END OF EACH YEAR FOR FOUR YEARS TO ASSURE THAT NO LESS THAN 75% OF THE ORIGINAL PLANTED QUANTITY SURVIVES. IF THE MINIMUM NUMBER HAS NOT BEEN PROVIDED THE AREA MUST BE SUPPLEMENTED WITH ADDITIONAL SEEDLINGS TO REACH THE REQUIRED NUMBER AT TIME OF PLANTING.
18. SOURCE OF SEEDLINGS: TBD. PLANTING STOCK SEED SOURCE SHALL BE FROM WITHIN THE GEOGRAPHIC REGION SUITED FOR GROWTH IN PRINCE GEORGE'S COUNTY, MARYLAND.
19. CONTRACTOR SHALL REMOVE AND PROPERLY DISPOSE OF SOIL CONTAMINATED WITH OIL PRODUCTS, SOLUBLE SALTS, FERROUS IRON, SOLUBLE ALUMINUM, SOLUBLE MANGANESE, OR HERBICIDE.

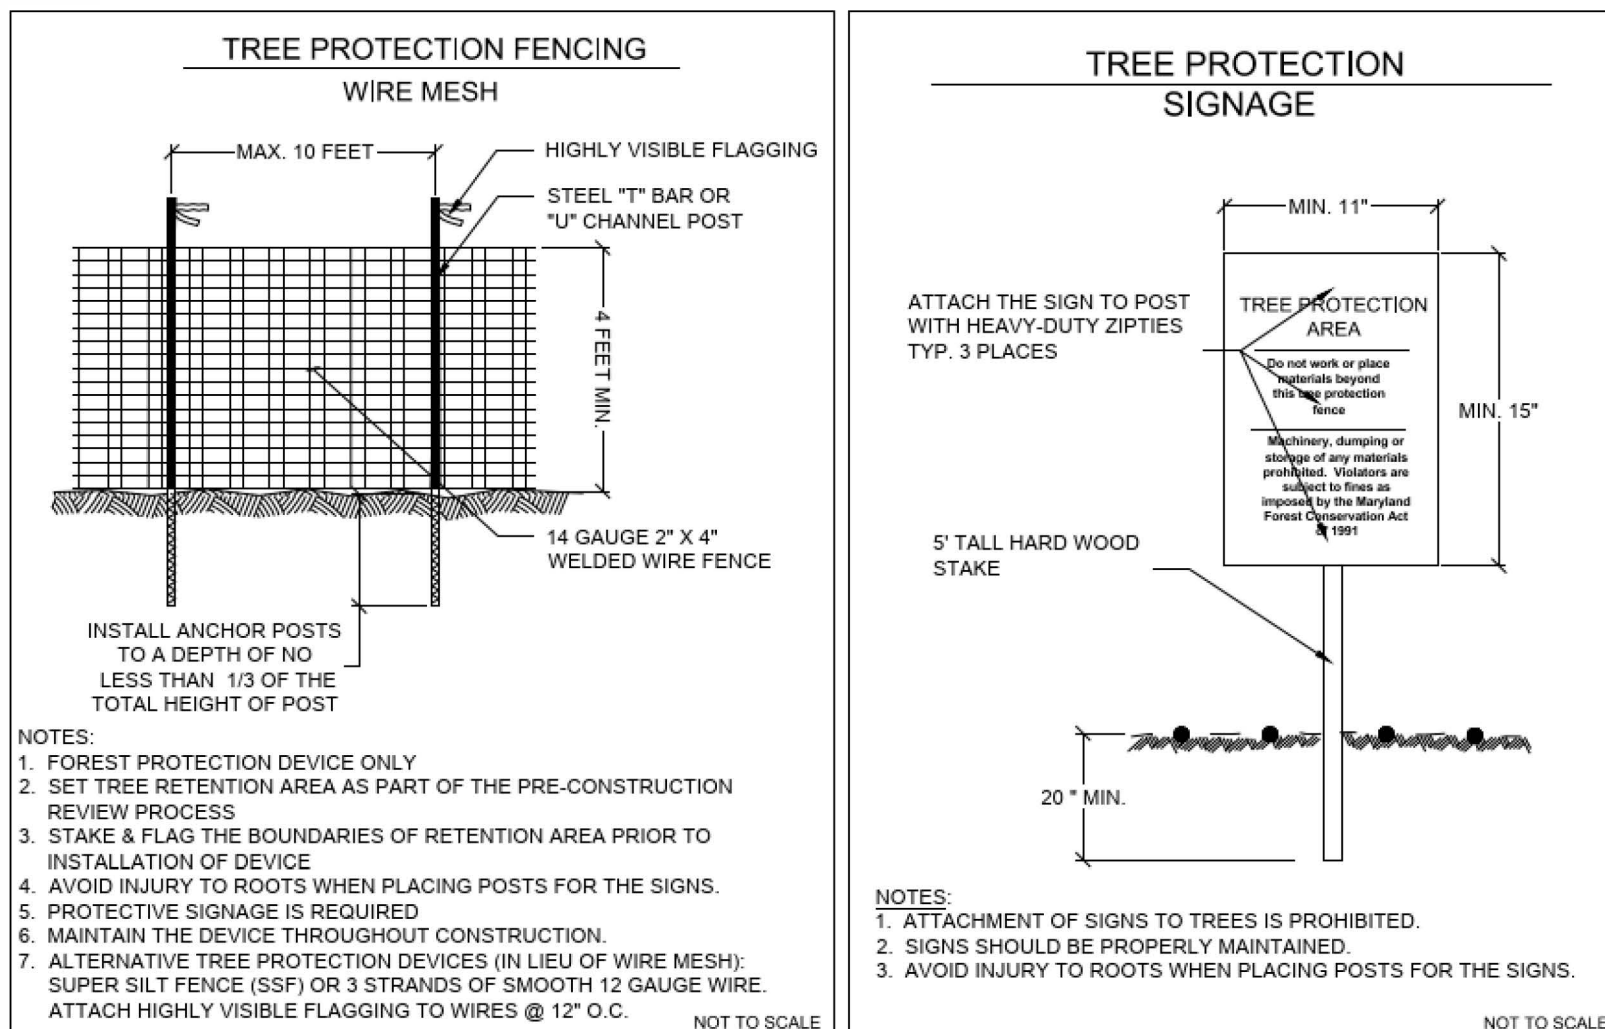

FIELD CHECK THE RE/AFFORESTATION AREA ACCORDING TO THE FOLLOWING SCHEDULE:

(SEPTEMBER - NOVEMBER) SEE NOTE 1)  
WATERING IS NEEDED (2X / MONTH)  
CONTROL OF UNDESIRABLE VEGETATION AS NEEDED  
(1X IN JUNE AND 1X IN SEPTEMBER MIN.)

YEAR 2-3: REINFORCEMENT PLANTING IF NEEDED (SEE NOTE 2)  
SURVIVAL CHECK ONCE ANNUALLY (SEPTEMBER - NOVEMBER)  
CONTROL OF UNDESIRABLE VEGETATION IF NEEDED  
(1X IN MAY AND 1X IN AUGUST MIN.)



YEAR 4: REINFORCEMENT PLANTING IF NEEDED (SEE NOTE 2)  
SURVIVAL CHECK (SEPTEMBER - NOVEMBER)

NOTES:

1. SURVIVAL CHECK: CHECK PLANTED STOCK AGAINST PLANT LIST (OR AS-BUILT) BY WALKING THE SITE AND TAKING INVENTORY. PLANTS MUST SHOW VITALITY. SUBMIT FIELD DATA FORMS (CONDITION CHECK SHEETS) TO OWNER AFTER EACH INSPECTION. REMOVE ALL DEAD PLANTS.
2. REINFORCEMENT PLANTING: REPLACE DEAD OR MISSING PLANTS IN SUFFICIENT QUANTITY TO BRING THE TOTAL NUMBER OF LIVE PLANTS TO AT LEAST 75% OF THE NUMBER ORIGINALLY PLANTED. IF A PARTICULAR SPECIES SUFFERS UNUSUALLY HIGH MORTALITY, REPLACE WITH AN ALTERNATIVE PLANT TYPE.
3. MISCELLANEOUS: FERTILIZATION OR WATERING DURING YEARS 1 THROUGH 3 WILL BE DONE ON AN AS NEEDED BASIS. SPECIAL RETURN OPERATIONS OR RECOMMENDATIONS WILL BE CONDUCTED ON AN AS NEEDED BASIS.

PRIOR TO ISSUANCE OF THE FIRST PERMIT FOR THE DEVELOPMENT SHOWN ON THIS TCP2, ALL OFF-SITE WOODLAND CONSERVATION REQUIRED BY THIS PLAN SHALL BE IDENTIFIED ON AN APPROVED TCP2 PLAN AND RECORDED AS AN OFF-SITE EASEMENT IN THE LAND RECORDS OF PRINCE GEORGE'S COUNTY. PROOF OF RECORDATION OF THE OFF-SITE CONSERVATION SHALL BE PROVIDED TO THE M-NCPPC, PLANNING DEPARTMENT PRIOR TO ISSUANCE OF ANY PERMIT FOR THE ASSOCIATED PLAN.

1. IF THE DEVELOPER OR BUILDER NO LONGER HAS AN INTEREST IN THE PROPERTY AND THE NEW OWNER DESIRES TO REMOVE A HAZARDOUS TREE OR PORTION THEREOF, THE NEW OWNER SHALL OBTAIN A WRITTEN STATEMENT FROM A CERTIFIED ARBORIST OR LICENSED TREE EXPERT IDENTIFYING THE HAZARDOUS CONDITION AND THE PROPOSED CORRECTIVE MEASURES PRIOR TO HAVING THE WORK CONDUCTED. AFTER PROPER DOCUMENTATION HAS BEEN COMPLETED PER THE HANDOUT "GUIDANCE FOR PRINCE GEORGE'S COUNTY PROPERTY OWNERS, PRESERVATION OF WOODLAND CONSERVATION AREAS", THE ARBORIST OR TREE EXPERT MAY THEN REMOVE THE TREE. THE STUMP SHALL BE CUT AS CLOSE TO THE GROUND AS POSSIBLE AND LEFT IN PLACE. THE REMOVAL OR GRINDING OF THE STUMPS IN WOODLAND CONSERVATION AREAS IS NOT PERMITTED.  
IF A TREE OR PORTION THEREOF ARE IN IMMINENT DANGER OF STRIKING A STRUCTURE, PARKING AREA, OR OTHER HIGH USE AREA AND MAY RESULT IN PERSONAL INJURY OR PROPERTY DAMAGE THEN THE CERTIFICATION IS NOT REQUIRED AND THE PERMITEE SHALL TAKE CORRECTIVE ACTION IMMEDIATELY. THE CONDITION OF THE AREA SHALL BE FULLY DOCUMENTS THROUGH PHOTOGRAPHS PRIOR TO CORRECTIVE ACTION BEING TAKEN. THE PHOTOS SHALL BE SUBMITTED TO THE INSPECTOR FOR DOCUMENTATION OF THE DAMAGE.  
TREE WORK TO BE COMPLETED WITHIN A ROAD RIGHT-OF-WAY REQUIRES A PERMIT FROM THE MARYLAND DEPARTMENT OF NATURAL RESOURCES UNLESS THE TREE REMOVAL IS SHOWN WITHIN THE APPROVED LIMITS OF DISTURBANCE ON A TCP2. THE WORK IS REQUIRED TO BE CONDUCTED BY A LICENSED TREE EXPERT.
2. THE REMOVAL OF NOXIOUS, INVASIVE, AND NON-NATIVE PLANT SPECIES FROM ANY WOODLAND PRESERVATION AREA SHALL BE DONE WITH THE USE OF HAND-HELD EQUIPMENT ONLY (PRUNERS OR A CHAINSAW). THESE PLANTS MAY BE CUT NEAR THE GROUND AND MATERIAL LESS THAN TWO INCHES DIAMETER MAY BE REMOVED FROM THE AREA AND DISPOSED OF APPROPRIATELY. ALL MATERIAL FROM THESE NOXIOUS, INVASIVE, AND NON-NATIVE PLANTS GREATER THAN TWO (2) INCHES DIAMETER SHALL BE CUT TO ALLOW CONTACT WITH THE GROUND, THUS ENCOURAGING DECOMPOSITION.
3. THE USE OF BROADCAST SPRAYING OF HERBICIDES IS NOT PERMITTED. HOWEVER, THE USE OF HERBICIDES TO DISCOURAGE RE-SPROUTING OF INVASIVE, NOXIOUS, OR NON-NATIVE PLANTS IS PERMITTED IF DONE AS AN APPLICATION OF THE CHEMICAL DIRECTLY TO THE CUT STUMP IMMEDIATELY FOLLOWING CUTTING OF PLANT TOPS. THE USE OF HERBICIDE SHALL BE DONE IN ACCORDANCE WITH THE LABEL INSTRUCTIONS.
4. THE USE OF CHAINSAWS IS EXTREMELY DANGEROUS AND SHOULD NOT BE CONDUCTED WITH POORLY MAINTAINED EQUIPMENT, WITHOUT SAFETY EQUIPMENT, OR BY INDIVIDUALS NOT TRAINED IN THE USE OF THIS EQUIPMENT FOR THE PRUNING AND/OR CUTTING OF TREES.

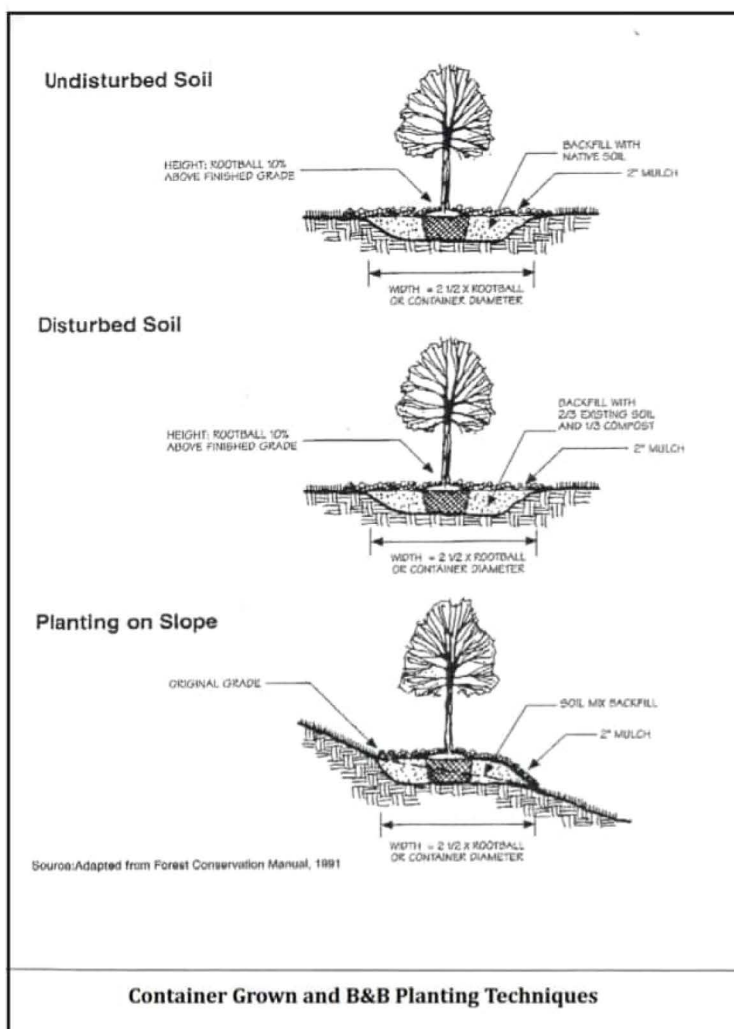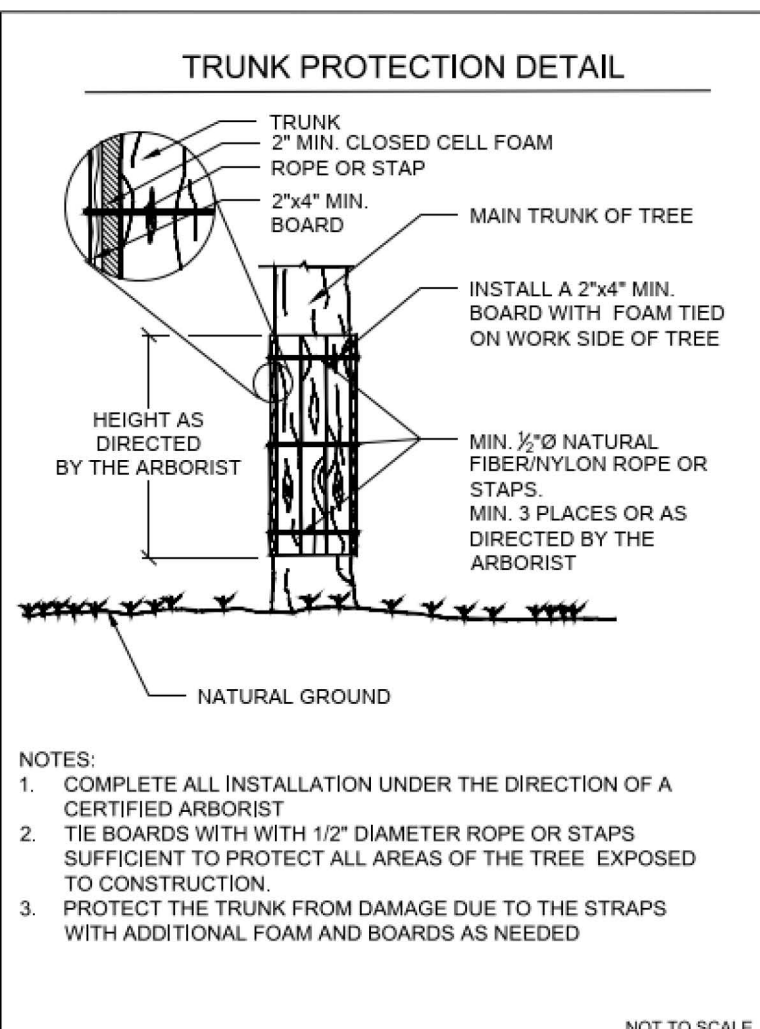

1. CALL MISS UTILITY AT 811 OR 1-800-257-7777 TO MARK UTILITIES AT LEAST 48 HOURS BEFORE DIGGING.
2. ALL MATERIALS AND PLANTING PROCEDURES EXCEPT AS OTHERWISE NOTED SHALL CONFORM TO THE LATEST EDITION OF "LANDSCAPE SPECIFICATION GUIDELINES" BY THE LANDSCAPE CONTRACTORS ASSOCIATION MD-DC-VA.
3. PLANTS SHALL CONFORM TO THE CURRENT EDITION OF THE AMERICAN STANDARD FOR NURSERY STOCK. (ANSI Z60.1)
4. PLANT NAMES SHALL BE THOSE GIVEN IN THE LATEST EDITION OF STANDARD PLANT NAMES. AMERICAN COMMITTEE ON HORTICULTURAL NOMENCLATURE.
5. TOPSOIL AND SOIL SPECIFICATIONS AS PER THE 1984 MD STANDARDS AND SPECIFICATIONS FOR SOIL AND EROSION AND SEDIMENT CONTROL.
6. THE CONTRACTOR SHALL STAKE OUT ALL PLANTING BEDS AND TREE LOCATIONS AND THESE MUST BE APPROVED BY THE LANDSCAPE ARCHITECT BEFORE DIGGING. IT IS THE CONTRACTOR'S RESPONSIBILITY TO LOCATE AND COORDINATE PLANTINGS WITH ALL EXISTING UTILITIES. IF DISCREPANCIES OCCUR BECAUSE OF UTILITY LOCATIONS OR OTHER EXISTING CONDITIONS THE CONTRACTOR SHALL NOTIFY THE LANDSCAPE ARCHITECT IMMEDIATELY TO COORDINATE ANY NECESSARY ADJUSTMENTS.
7. ALL PLANT MATERIAL SHALL BE LABELED BY THE NURSERY AND DELIVERED WITH LABELS IN PLACE FOR INSPECTION. SUBSTITUTIONS IN PLANT SPECIES OR SIZE WILL NOT BE PERMITTED EXCEPT WITH THE APPROVAL OF THE LANDSCAPE ARCHITECT. PRUNING IS NOT TO OCCUR UNTIL MATERIAL HAS BEEN PLANTED. CONTRACTOR SHALL PRUNE PLANT MATERIAL AS SOON THEREAFTER AS IS ADVISABLE UNDER STANDARD HORTICULTURAL PRACTICES.
8. IF IT IS DETERMINED THAT THE PLANT MATERIAL BE SET SLIGHTLY HIGHER IN RELATION TO GRADE THAN IT WAS GROWN IN THE NURSERY AND WITH GOOD EARTH TO ROOT CONTACT, ANY MATERIALS OR WORK MAY BE REJECTED BY THE LANDSCAPE ARCHITECT IF IT DOES NOT MEET THIS OR ANY OTHER REQUIREMENT OF THE SPECIFICATIONS, AND REJECTED MATERIALS SHALL BE REMOVED FROM THE SITE BY THE CONTRACTOR AT CONTRACTOR'S EXPENSE.
9. THE CONTRACTOR SHALL MULCH AND WATER ALL PLANTS WELL ON THE DAY THEY ARE PLANTED. THE SURFACE MULCH LAYER SHALL CONSIST OF STANDARD FINE SHREDED AGED HARDWOOD MULCH. THE CONTRACTOR SHALL APPLY THE MULCH UNIFORMLY TO A 2 TO 3 INCH DEPTH. BARK SHALL BE KEPT 3 TO 4 INCHES AWAY FROM ALL TRUNKS AND WOODY STEMS.
10. IN CASE OF DISCREPANCIES BETWEEN QUANTITIES ON THE PLANT LIST AND THE PLAN, THE PLAN SHALL GOVERN.
11. ANY PLANTING WITHIN A FOREST RETENTION AREA, AS DESIGNATED ON THE FOREST CONSERVATION PLAN AND SHOWN ON THIS PLAN, MUST BE DONE TO AVOID ANY ADVERSE IMPACT TO THE ROOTS OF EXISTING TREES. THE CONTRACTORS PERFORMING WORK ON THE SITE ARE RESPONSIBLE FOR PROTECTING EXISTING NATIVE AND NON-INVASIVE PLANTINGS DURING CONSTRUCTION.
12. REFORESTATION/AFFORESTATION STOCKING RATE SHALL BE 300 - 1" CAL. TREES/AC AND 100 - 3 GAL. SHRUBS/AC.
13. SURVIVAL RATE OF REFORESTATION/AFFORESTATION PLANTING SHALL BE 85% AT THE END OF THE SECOND GROWING SEASON.



CALL "MISS UTILITY" AT 1-800-257-7777, 48 HOURS PRIOR TO THE START OF WORK. THE EXCAVATOR MUST NOTIFY ALL PUBLIC UTILITY COMPANIES WITH UNDERGROUND FACILITIES IN THE AREA OF PROPOSED EXCAVATION AND HAVE THOSE FACILITIES LOCATED BY THE UTILITY COMPANIES PRIOR TO COMMENCING EXCAVATION. THE EXCAVATOR IS RESPONSIBLE FOR COMPLIANCE WITH REQUIREMENTS OF THE PRINCE GEORGE'S COUNTY CODE.

I/WE, MARYLAND NATIONAL CAPITAL PARKS AND PLANNING COMMISSION OF PRINCE GEORGE'S COUNTY, HEREBY ACKNOWLEDGE THAT WE ARE AWARE OF THIS TYPE 2 TREE CONSERVATION PLAN (TCP2) AND THAT WE UNDERSTAND THE REQUIREMENTS AS SET FORTH IN THIS TCP2.

*Jennifer Bruneau* 3/7/2024  
OWNER OR OWNERS REPRESENTATIVE DATE

THIS PLAN COMPLIES WITH THE CURRENT REQUIREMENTS OF PRINCE  
GEORGE'S COUNTY CODE AND THE ENVIRONMENTAL TECHNICAL MANUAL.

SIGNED: [Signature] DATE: 12-08-2023

MARLA DULEY  
LEAD ENVIRONMENTAL SCIENTIST, QP  
WSP, 1 EAST PRATT STREET, SUITE 300, BALTIMORE, MARYLAND 21202  
410-246-0532  
MARLA.DULEY@WSP.COM

Prince George's County Planning Department, M-NCPPC				
Environmental Planning Section				
<b><u>TYPE 2 TREE CONSERVATION PLAN APPROVAL</u></b>				
<b>TCP2-022-92</b>				
	Approved by	Date	DRD#	Reason for Revision
00	D. Wood	2/19/1992	NA	Lyndon Street Water Quality Retrofit
01	<i>Kim Finch</i>	<i>3/25/2024</i>		Bridge relocation
02				
03				
04				
05				



WSP USA Inc.  
1 EAST PRATT STREET  
SUITE 300  
BALTIMORE, MD 21202  
TEL: +1.410.727.5050  
FAX: +1.410.727.4608

## TREE CONSERVATION NOTES AND DETAILS

# TCP2.0