

THIS DRINT MADE OFD DA 20

GENERAL NOTES

This plan is submitted to fulfill the woodland conservation requirements for SE-4647. If SE-4647 expires, then this TCP2 also expires and is no longer

THE RESERVE OF THE PROPERTY OF

- Cutting or clearing of woodland not in conformance with this plan or without the expressed written consent of the Planning Director or designee shall be subject to a \$9.00 per square foot mitigation fee.
- . A pre-construction meeting is required prior to the issuance of grading permits. The Department of Public Works and Transportation or the Department of Environmental Resources, as appropriate, shall be contracted prior to the start of any work on the site to conduct a pre-construction meeting where implementation of woodland conservation measures shown on this plan will be discussed in detail. The developer or builder of the lots or parcels shown on this plan shall
- notify future buyers of any woodland conservation areas through the provision of a copy of this plan at time of contract signing. Future property owners are also subject to this requirement.
- 5. The owners of the property subject to this tree conservation plan are solely responsible for conformance to the requirements contained herein. 6. The property is within the Developing Tier and is zoned R-R (Rural
- The property is adjacent to Accokeek Road and McKendree Road which are both designated historic roadways.

Residential) and M-X-T (Mixed Use-Transportation oriented).

8. The site is not adjacent to a roadway classified as arterial or greater. 9. This plan is not grandfathered under CB-27-2010, Section 25-177(g).

TREE PRESERVATION AND RETENTION NOTES

2. All woodlands designated on this plan for preservation are the responsibility of the property owner. The woodland areas shall remain in a natural staté. This includes the canopy trees and understory vegetation. A revised tree conservation plan is required prior to clearing woodland areas that are not specifically Identified to be cleared on the approved

Tree and woodland conservation methods such as root pruning shall be conducted as noted on this plan.

?. The location of all temporary tree protection fencing (TPFs) shown on this

- plan shall be flagged or staked in the field prior to the pre-construction meeting. Upon approval of the locations by the county inspector, installation of the TPFs may begin. 13. All temporary tree protection fencing required by this plan shall be
- Installed prior to the commencement of clearing and grading of the site and shall remain in place until the bond is released for the project. Failure to install and maintain temporary or permanent tree protective devices is a violation of this TCP2.
- 14. Woodland preservation areas shall be posted with signage as shown on the plans at the same time as the temporary TPF installation. These signs
- must remain in perpetuity. 15. The developer and/or builder is responsible for the complete preservation of all forested areas shown on the approved plan to remain
- undisturbed. Only trees or part thereof designated by the county as dead, dylng, or hazardous may be removed. 16. A tree is considered hazardous if a condition is present which leads a Certified Arborist or Licensed Tree Expert to believe that the tree or a

portion of the tree has a potential to fall and strike a structure, parking

area, or other high use area and result in personal injury or property 17. During the Initial stages of cleaning and grading, if hazardous trees are present, or trees are present that are not hazardous but are leaning into the disturbed area, the permitee shall remove said trees using a chain saw. Corrective measures requiring the removal of the hazardous tree or portions thereof shall require authorization by the county inspector. Only after approval by the inspector may the tree be cut by chain saw to near

the existing ground level. The stump shall not be removed or covered

- with soll, mulch or other materials that would inhibit sprouting. 18. If a tree or trees become hazardous prior to bond release for the project, due to storm events or other situations not resulting from an action by the permitee, prior to removal, a Certified Arborist or a Licensed Tree Expert must certify that the tree or the portion of the tree in question has a potential to fall and strike a structure, parking area, or other high use area and may result in personal injury or property damage. If a tree or portions thereof are in imminent danger of striking a structure, parking area, or other high use area and may result in personal injury or property damage then the certification is not required and the permitee shall take corrective action immediately. The condition of the area shall be fully documented through photographs prior to corrective action being taken. The photos shall be submitted to the inspector for documentation
- If corrective pruning may alleviate a hazardous condition, the Certified Arborist or a Licensed Tree Expert may proceed without further authorization. The pruning must be done in accordance with the latest edition of the appropriate ANSI A-300 Pruning Standards. The condition of the area shall be fully documented through photographs prior to corrective action being taken. The photos shall be submitted to the inspector for documentation of the damage.
- Debris from the tree removal or pruning that occurs within 35 feet of the woodland edge may be removed and properly disposed of by recycling, chipping or other acceptable methods. All debris that is more than 35 feet from the woodland edge shall be cut up to allow contract with the ground, thus encouraging decomposition. The smaller materials shall be placed into brush piles that will serve as wildlife habitat. Tree work to be completed within a road right-of-way requires a permit
- from the Maryland Department of Natural Resources unless the tree removal is shown within the approved limits of disturbance on a TCP2. The work is required to be conducted by a Licensed Tree Expert. Work on this project will be initiated in several phases. All temporary TPFs required for a given phase shall be installed prior to any disturbance
- within that phase of work. 10. Tree protection fencing (TPFs) is not required for all or portions of this plan because an undisturbed IOO-foot buffer of open land/or a 50-foot forested buffer is being maintained between the limit of disturbance (LOD) and the woodland preservation areas. If the LOD changes and the change impacts these buffers, the county inspector shall be contacted to evaluate

the change to determine If a revision to the tree conservation plan is

necessary or if Installation TPFs will be required.

AFFORESTATION AND REFORESTATION NOTES

All afforestation and reforestation bonds, based on square footage, shall be posted with the county prior to the issuance of any permits. These bonds will be retained as surety until all required activities have been satisfied or the required timeframe for maintenance has passed, whichever is longer.

- The planting of afforestation or reforestation areas as required by the current mining phase shall be completed prior to initiation of mining in that phase. All reforestation that is proposed on any reclaimed portion of the site should be installed subsequent to the final stabilization requirements. Seedling planting is to occur from November through May only. No planting shall be done while ground 15 frozen. Planting with large caliper stock or containerized stock may be done at any time provided a detailed maintenance schedule is provided.
- If planting cannot occur due to planting conditions, the developer or property owner shall install the fencing and signage in accordance with the approved Type 2 Tree Conservation Plan. Planting shall then be accomplished during the next planting season. If planting is delayed beyond the transfer of the property title to the homeowner, the developer or builder shall obtain a signed statement from the purchaser indicating that they understand that the reforestation area is located on their property and that reforestation will occur during the rext planting season. A copy of that document shall be presented to the Grading Inspector and the county.
- Reforestation areas shall not be mowed. The management of competing vegetation around individual trees and the removal of noxlous, invasive, and non-native vegetation within the reforestation areas is acceptable.
- 5. All required temporary tree protection fencing shall be installed prior to the clearing and grading of the site and shall remain in place until the permanent tree protection fencing is installed with the required planting. The temporary fencing is not required to be installed if the permanent fencing is installed prior to clearing and grading of the site. Failure to install and maintain temporary or permanent tree protective fencing is a violation of this TCP2.
- Afforestation/reforestation areas shall be posted with notification signage, as shown on the plans, at the same time as the permanent protection fencing installation. These signs shall remain in perpetuity.
- The county inspector shall be notified prior to soil preparation or initiation of any tree planting on this site.
- At time of issuance of the first permit, the following information shall be submitted to the M-NCPPC Planning Department regarding the contractor responsible for implementation of this plan; contractor name; business name (if different); address; and phone number. Results of annual survival checks for each of the required four years after tree
- Failure to establish the afforesation or reforestation within the prescribed time frame will resulting the forfeiture of the reforestation bond and/or a violation of this plan including the associated \$9.00 per square foot penalty unless the county

Inspector approves a written extension. PLANTING SPECIFICATION NOTES

planting shall be reported to the M-NCPPC, Planning Department.

- Quantity: (See Plant Schedule)
- Type: (See Plant Schedule)
- Plant Quality Standards: The plants selected shall be healthy and sturdy representatives of their species. Seedlings shall have a minimum top growth of 18". The diameter of the root collar (the part of the root just below ground level) shall be at least 3/8". The roots shall be well developed and at least 8" long, no more than twenty-five percent (25%) of the root system (both primary and auxiliary/fibrous roots) shall be present.
- Plants that do not have an abundance of well developed terminal buds on the leaders and branches shall be rejected. Plants shall be shipped by the nursery immediately after lifting from the field or
- removal from the green house, and planted immediately upon receipt by the If the plants cannot be planted immediately after delivery to the reforestation site, they shall be stored in the shade with their root masses protected from direct
- exposure to sun and wind by the use of straw, peat moss, compost, or other suitable material and shall be maintained through periodic watering, until the time of planting. Planting Handling: The quantity of seedlings taken to the field shall not exceed the quantity that can be plated in a day. Seedlings, once removed from the nursery or temporary storage area shall be planted immediately.
- Timing of Planting: The best time to plant seedlings is while they are dormant, prior to spring budding. The most suitable months for planting are March and April, when the soil is moist, but may be planted from March through November. No planting shall he done while ground is frozen. Planting shall occur within one growing season of the issuance of grading/building permits and/or reaching the final grades and stabilization of planting areas.
- Seedling Planting: Tree seedlings shall be hand planted using a dibble bar or sharp-shooter shovel. It is important that the seedling be placed in the hole so that the roots can spread out naturally; they should not be twisted, balled up or bent. Moist soil should then be packed firmly around the roots. Seedlings should be planted at a depth where their roots lie just below ground surface. Air pockets should not be left after closing the hole which would allow the roots to dry out. See planting details for further explanation. If the contractor wishes to plant by another method, the preparer of this tree conservation plan must be contracted and give his approval before planting may begin. Spacing: See Plant Schedule and/or Planting Plan for spacing requirements. Also
- refer to the Planting Layout detail for a description of the general planting theory. 3. Soil: Upon the completion of all grading operations, a soil test shall be conducted to determine what soil preparation and soil amendments, if any, are necessary to create good tree growing conditions. Soil samples shall be taken at a rate that provides one soil sample for each area that appears to have a different soil type (if the entire area appears uniform, then only one sample is necessary), and

submitted for testing to a private company. The company of choice shall make

recommendations for improving the existing soil. The soil will be tested and

- recommended for corrections of soll texture, pH, magnesium, phosphorus, potassium, calcium and organic matter. Soil Improvement Measures: The soil shall then be improved according to the
- recommendations made by the testing company. Fencing and Signage: Final protective fencing shall be placed on the visible and/or development side of planting areas. The final protective fence shall be installed upon completion of planting operation unless it was installed during the initial stages of development. Signs shall be posted per the signage detail on this sheet.
- Planting method: Consult the Planting Detail(s) shown on this plan. Mulching: Apply two-inch thick layer of woodchip or shredded hardwood mulch (as noted) to each planting site (see detail shown on this plan).
- 13. Groundcover Establishment: The remaining disturbed area between seedling planting site shall be seeded and stabilized with white clover seed at the rate of 5 ibs/acre.
- 14. Mcwing: No mowing shall be allowed in any planting area.
- 15. Survival Check for Bond Release: The seedling planting is to be checked at the end of each year for four years to assure that no less than 75% of the original planted quantity survives. If the minimum number has not been provided the area must be supplemented with additional seedlings to reach the required number at time
- 16. Source of Seedlings: State name, address, and phone number of nursery or supplier. When areas designated for reforestation will be reforested by natural regeneration the following notes shall be added to the plan:

NATURAL REGENERATION NOTES

- All areas designated for reforestation shall be reforested by natural regeneration. The following requirements and conditions apply: 1. All existing turf, ground covers, and invasive species shall be exterminated using a
- general broadcast herbicide such as Round-Up or equivalent. Secondary applications shall be applied as necessary. 2. Care shall be taken to avoid spraying any hardwood seedlings or sapilings. 3. Roto-tilling of turf areas and manual removal of invasive vines shall be completed two weeks after chemical treatments are completed.
- 4. Reforestation signs shall be installed every fifty feet cras appropriate and two strand wire fencing shall be installed along road frontages adjacent to any reforestation areas. 5. Reforestation internal to the site shall be posted as required in the direction of
- any tralls used to reach those areas. 6. Natural regeneration shall be encouraged by seml-annual maintenance of the designated areas. The maintenance shall, at a minimum, require removal of competitive and invasive species from the desired indigenous hardwoods. This
- maintenance shall occur for a period of two years. 7. After one and two years all desirable seedlings and saplings shall be counted and flagged with surveyors tape in the late fall.
- 8. If after two years there is less than one seedling per 60 square feet and there are indications that natural regeneration is not occurring adequately then the owners shall plant those areas with container grown seedlings at a rate of one per 60 square feet. Only naturally occurring species already present within the site

FOUR-YEAR MANAGEMENT PLAN FOR RE/AFFORESTATION AREAS Field check the re-afforestation area according to the following schedule:

Survival Check (September-November)

- Tear I: Site Preparation and Tree Planting Survival check once annually (September-November) see Note 1) Watering is needed (2 x month) Control of undesirable vegetation as needed (I \times in June and I \times in
- September min.) Year 2-3: Reinforcement planting is needed (See Note 2) Survival check once annually (September-November)
- Control of undesirable vegetation if needed (i x in May and I x in August min.) Reinforcement planting if needed. (See Note 2)
 - 1. Survival Check: Check planted stock against plant list (or as-built) by walking the site and taking inventory. Plants must show vitality. Submit field data Forms (Condition Check Sheets) to owner after each inspection. Remove all dead plants. 2. Reinforcement Planting: Replace dead or missing plants in sufficient quantity to bring the total number of live plants to at least 75% of the number originally planted. If a particular species suffers unusually high mortality, replace with an alternative plant type. 3. Miscellaneous: Fertilization or watering during years I through 3 will be done on an as needed basis. Special return operations or recommendations will be conducted on an as needed basis.

POST DEVELOPMENT NOTES

1. If the developer or builder no longer has an interest in the property and the new owner desires to remove a hazardous tree or portion thereof, the new owner shall obtain a written statement from a Certified Arborist or Licensed Tree Expert identifying the hazardous condition and the proposed corrective measures prior to having the work conducted. After property documentation has been completed per the handout "Guldance for Frince George's County Property Owners, Preservation of Woodland Conservation Areas", the arborist or tree expert may then remove the tree. The stump shall be cut as close to the ground as possible and left in place. The removal or grinding of the stumps in the Moodland conservation area is not

If a tree or portions thereof are in imminent danger of striking a structure, parking area, or other high use area and may result in personal injury or property damage then the certification is not required and the permittee shall take corrective action Immediately. The condition of the area shall be fully documented through photographs prior to corrective action being taken. The photos shall be submitted to the inspector for documentation of the damage.

- Tree work to be completed within a road right-of-way requires a permit from the Maryland Department of Natural Resources unless the tree removal is shown within the approve limits of disturbance on a TCP2. The work is required to be conducted by a Licensed Tree Expert.
- The removal of noxlous, invasive, and non-native plant species from any woodland preservation area shall be done with the use of hand-held equipment only (pruners or a chain saw). These plants may be cut near the ground and material less than two inches diameter may be removed from the area and disposed of appropriately All material from these noxious, invasive, and non-native plants greater than two (2) inches diameter shall be cut to allow contact with the ground, thus encouraging
- The use of broadcast spraying of herbicides is not permitted. However, the use of herbicides to discourage ré-sprouting of invasive, noxious, or non-native plants is permitted if done as an application of the chemical directly to the cut stump mmediately following cutting of plant tops. The use of any herbicide shall be done in accordance with the label instructions.
- The use of chainsaws is extremely dangerous and should not be conducted with poorly maintained equipment, without safety equipment, or by individuals not trained in the use of this equipment for the pruning and/or cutting of trees.

PROTECTION OF REFORESTATION AND AFFORESTATION AREAS Reforestation fencing and signage shall remain in place in accordance with the

approved Type 2 Trée Conservation Plan.

PLAN VIEW


NO SCALE SECTION

FOR TREES LESS THAN 12' HT.

* NOTE: STAKES, STRAPPING AND WIRES TO BE REMOVED SIX MONTHS AFTER INSTALLATION

EVERGREEN TREE PLANTING DETAIL


Reforestation areas shall not be moved; however, the management of competing vegetation and removal of noxlous, invasive, and non-native vegetation around inalvidual trees is acceptable.

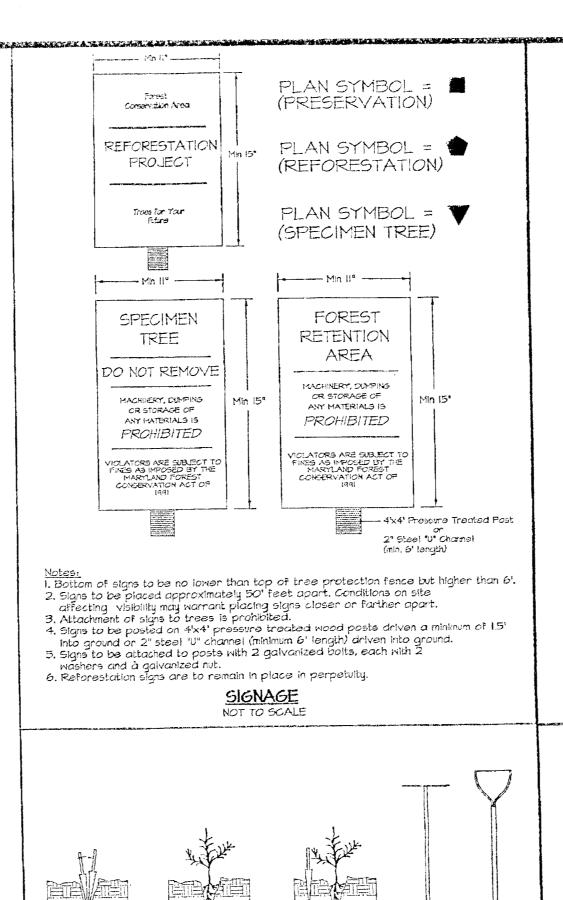

5. PUSH HANDLE OF DIBBLE 6. INSERT DIBBLE 2 INCHES

SEEDLING PLANTING DETAIL

INSERT DIBBLE AT ANGLE SHOWN ABOVE AND PUSH FURWARD TO UPRIGHT POSITION

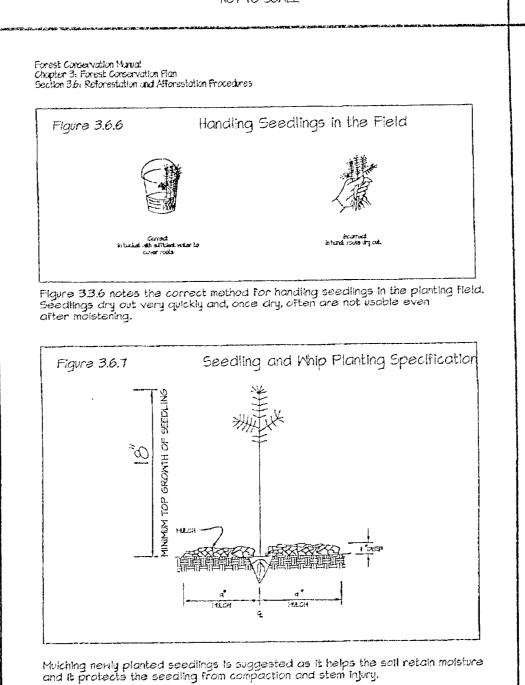

SAUCER WITH SHREDDED

REMOVE TOP 1/3 OF

PIT AND ROOTBALL-

BURLAP AND TWINE ----

PLAN SYMBOL

Forest preservation, specimen tree and relaf-forestation protection device.

3. Boundaries of protected areas should be staked and flagged prior to installing

1. Contractor may use blaze orange tree protection fence or equal according to MD State Forest Conservation Technical Manual Figure D-5.

TREE PROTECTION FENCING - TYPE

Frotected areas will be set as part of the review process.

6. Device should be properly maintained during construction.

7. Use brightly colored surveyor's flagging every 4'.

8. Protective signage is also recommended.


4. Avoid root damage when placing anchor posts.

5. Wire should be securely attached to posts.

2 STRAND GALVANIZED STEE

WIRE 12 OR 14 GAUGE -

SURVEYOR'S FLAGGING -

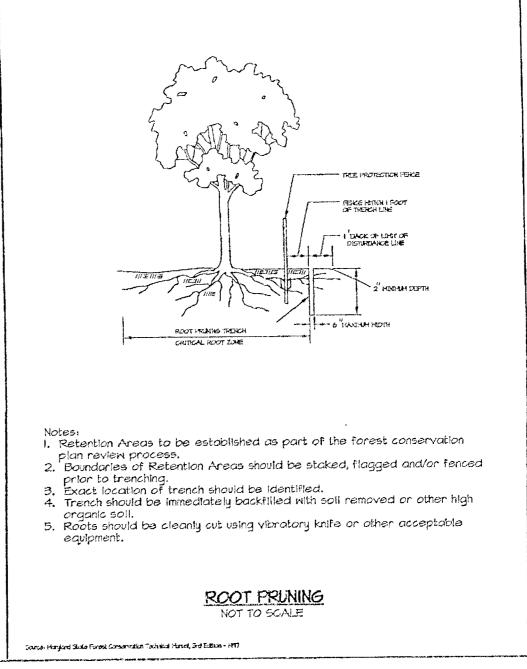

1. Retartion Area will be not as part of the review process.
2. Boundaries of Retartion Area should be stated and Flagged prior to installing device.
3. Avoid root damage when placing anchor posts.
4. Yere should be recurrily attached to posts.
5. Device should be properly matrianed during construction.
6. Use brightly colored surveyor's flagged every 4 feet.
7. Frotoctive signage is also recommended.

FILTER

STAPLE

JOINING TWO ADJACENT SILT

FENCE SECTIONS

CONSTRUCTION SPECIFICATIONS

Gootextile shall be fastered securely to each ferce post with mire ties or staples at top and mid-section
and shall meet the following requirements for Gootextile Class Fi

Tenello Strongth 50 (ba/hr/min) Teati (45/41 509)

Torsillo Modulus 20 too/at/(min.) Touti MSMT 504
Flow Rate 03 gal ft / alrulo (mcb/) Touti MSMT 322
Filtering Efficiency TE/8 (min.) Touti MSMT 322

Where ends of gootaxtile fabric come together, they shall be overlapped, folded and stapled to prevent seament bypass.

Gift Fence shall be inspected after each rainfall event and maintained when bulges occur or when seament accumulation reached 50% of the Fabris height.

COMBINATION SILT FENCE & TREE PROTECTION - TYPE

NOT TO SCALE

I. Fence posts shall be a minimum of 36° long artism (6° minimum into the ground). Wood posts shall be 1 1/2° X 1 1/2° square (irin) cut, or 1 3/4° diameter (initimum) round and shall be of sound quality handwood. Steel posts will be standard. Then U section weighting not less than 1.00 pound per inear foot.

SECTION A

-TYP. DIRT BACKFILL TO


CONTRACTOR NAMED AND ASSESSMENT

CLOTH =

CROSS SECTION

STANDARD STHEOL

EMEED GEOTEXTILE CLASS F A MINIMUM OF 3" VERTICALLY INTO THE GROUND

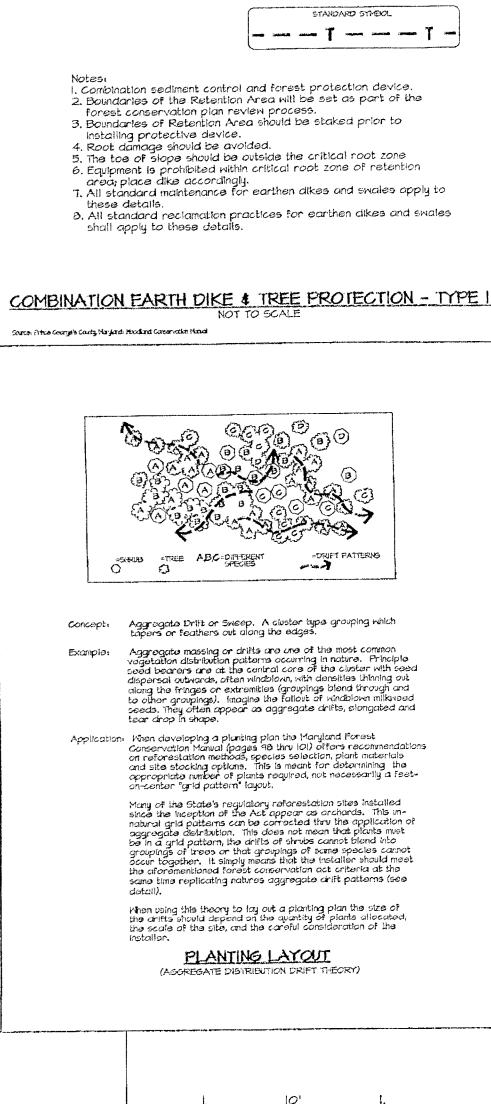

THEE PROTECTION HORE WITH



SHOOTER

Reforestation Area	Acreage	Seedling Selection							
		Red Oak	Black Locust	Lobloily Pine	White Oak	E. Red Bud	Sycamore	E. Red Cedar	Total No. of Seedlings
Ph. MRA-1	0.19	19	19	19	19	19	19	19	133
Ph. 2 WRA-8	1.15	115	115	115	115	115	115	115	805
Ph. 2 WRA-9	3.14	314	314	314	314	314	314	314	2,198
Ph. 3 WRA-10	8.12	812	812	812	812	812	812	812	5,684
Ph. 3 WRA-19	0.67	67	67	67	67	67	67	67	469
Ph. 4 WRA-11	9.48	948	948	948	948	948	948	948	6,636
TOTAL	22.75	2275	2275	2275	2275	2275	2275	2275	15,925

- 1. All tree/shrub species planted within the re/afforestation areas, should be randomly distributed throughout the proposed relafforestation area, so as to promute a natural woodland structure. (See Planting Layout detail) 2. In the event of species unavailability, a substitution may be made. Any
- substitution made requires written notification to MNCPPC, Environmental 3. Reforestation to meet the woodland conservation requirements in mining Phase will be met, in part, by using the Bufferyards and Landscape Strips along Accokeek Road and McKendree Road (WRA-2 thru WRA-7) and Natural Regeneration Areas NRA-1 thru NRA-3.

areas WRA-2 thru WRA-7 see "Plat of Special Exception Site and Landscape

4. For details regarding the planting specifications of Woodland Reforestation




- B+B OR CONTAINER

SHRUB PLANTING DETAIL

DECIDUOUS OR EVERGREEN

NO SCALE SECTION

(SEE SPECIFICATIONS)

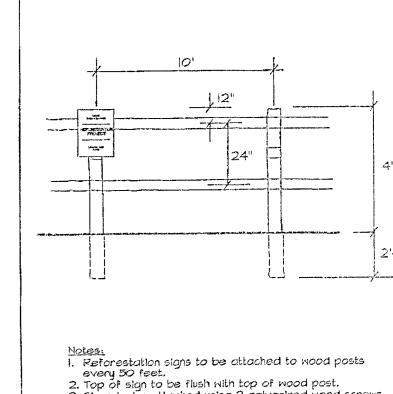

3. Signs to be attached using 2 galvanized wood screws each with a galvanized washer. SPLIT RAIL FENCE DETAIL

ACCORDEDING TO PLANT

SHRUB BED PLANTING PROFILE

Plan" (BDAI Dwg. No. 47.003-Z). NEVER CUT MAIN LEADER --NEVER GUT MAIN LEADER 2' SAUCER WITH SHREDDED THIN 1/3 OF NATURAL BRANCHING RETAINING NATURAL FORM HARDWOOD MULCH -SELECTIVELY PRUNE TOP 1/4th OF BRANCHE -DO NOT GUT LEADER REMOVE DAMAGED, BROKEN OR REMOVE DAMAGED, BROKEN OF CONFLICTING BRANCHES ----CONFLICTING BRANCHES ROMMETTED NYLON STRAPPING W/ 10 GUAGE GUY WIRE TWIST UNTIL TAUGHT (SEE * NOTE) 2-2' X 2' X G' HARDWOOD POST5-GROMMETTED NYLON STRAPPING WRAP TRUNK WITH TREE WRAP WRAP TRUNK WITH TREE WRAP. W/ 10 GUAGE GUY WIRE TWIST UNTIL TAUGHT TO SECOND TIER OF BRANCHES THE WITH TWINE AT THREE PLACES MINIMUM TO SECURE WRAP. N/ 10 GUAGE GUY WIRE 2-2" X 2" X G' MN. HARDWOOD STAKES TIE WITH TWINE AT THREE PLACES MINIMUM TO SECURE WRAP. DRIVEN INTO UNDISTURBED GROUND CSTART FROM BOTTOM AND SURVEYORS FLAG (TYP. 3 PLACES) OUTSIDE OF TREE PIT AREA (SEE *NOTE) CSTART FROM BOTTOM AND LOOSEN SIDES OF PLANT PIT AND ROOTBALL WITH FINISHED GRADE -2-3' SAUCER WITH 2-3' SHREDDED CUT AND REMOVE BURLAP FROM SET 1/8 OF ROOTBALL ABOVE CUT AND REMOVE BURLAP FROM HARDWOOD MULCH TOP 1/3 OF ROOTBALL - 2-3' SAUCER WITH 2-3' SHREDDED -2-3' SAUCER WITH 2-3' SHREDDED STAKES (3 REQUIRED) -BACKFILL SOIL MIX (SEE SPECS) 90' ANGLE TO WIRE PLACE STAKE 2" BELOW GRADE-- POSTS DRIVEN INTO UNDISTURBED CROUND - BACKFILL SOIL MIX (SEE SPECS) CLIT AND REMOVE BURLAP FROM

GROUND BACKFILL SOIL MIX (SEE SPECS) --- 12' MIN. B + B TREE PLANTING DETAIL NO SCALE SECTION FOR TREES LESS THAN 2 1/2' CALIPER

GROUND B + B TREE PLANTING DETAIL NO SCALE SECTION FOR TREES 2 1/2' CALIPER OR GREATER NOTE: STAKES, STRAPPING AND WIRES TO BE REMOVED SIX MONTHS AFTER INSTALLATION DECIDUOUS, B + B TREE PLANTING DETAILS

WOOD PRIOR TO PLANTING (SEE SPECIFICATIONS) CONTAINER TREE PLANTING DETAIL

> M-NCPPC Prince George's County Planning Departmer Environmental Planning Section APPROVAL TREE CONSERVATION PLAN TCP 2 / 059 / 09 Approved by inegen K. Reiser

- PRUNE ALL DAMAGED OR DEAD

OCT **04** 2013 OFFICE OF ZONING EXAMINER PRINCE GEORGE'S CTY, MD SE-4647

TREE CONSERVATION PLAN - TYPE II

DETAIL SHEET MILLVILLE QUARRY, INC ELECTION DISTRICT No. 11

PRINCE GEORGE'S COUNTY, MARYLAND

SHEET 7 OF 7 WSSC 200' SHEET SERIES 219 SE 06 \$ 07 ADC MAP BK LOCATION 5998 H. J & K-1 5-17-12

MITCHELLVELE, MARYLAND 20721 BEN DYER ASSOCIATES, INC Engineers / Surveyors / Planners DATE REVISED PER M-MCPPC COMMENTS DATED 10/12/11 10-31-11 REVISED PER M-MCPPC COMMENTS DATED 10/12/11 PCN COPYRIGHT @ 2009 BEN DYER ASSOCIATES. Revised to change reforestation locations to include PCN DRAWN BY DESIGNED BY CHECKED BY RECORD NO. PMA and landscape strips and bufferyards. Mike Petrakis DESCRIPTION DATE lualified Professional JANUARY 2009 COMAR 08.19.06.01 REVISIONS 301-982-1400 [:\LD7-PROJ\60132-LD7\SHEETS\TCP-2Det.dwg, 5/17/2012 10:06:08 AM, petmik

APPLICANT/OWNER AGGREGATE INDUSTRIES INC./ MILLVILLE QUARRY, INC. 6401 GOLDEN TRIANGLE DRIVE, SUITE 400 GREENBELT, MARYLAND 20770 ATTN: TIM BEVARD

54.016-

THIS PRINT MADE CED 04 26"